

BALDWIN[®]



RESERVE[™]
DEADBOLTS

DEADBOLTS



Traditional Arch (TAD)



Traditional Round (TRD)



Traditional Square (TSD)



Contemporary Round (CRD)



Contemporary Square (CSD)




Rustic Arch (RAD)



Rustic Square (RSD)

DEADBOLT SPECIFICATIONS

Door Preparation	2-1/8" cross bore. 1" edge bore for latch.
Door Thickness	1-3/4" to 2" standard. Thick door kits optional for doors up to 2-1/2". 1-3/8" to 1-3/4" thin door kits available for Traditional and Contemporary styles only. Thin door option not available with Rustic Deadbolt styles.
Cylinder	Baldwin 5-pin C-Keyway standard. SmartKey® Re-key Technology optional.
Backset	Adjustable 2-3/8" or 2-3/4".
Front & Latch	Square Corner Adjustable (SL) standard. Round Corner (RL), Drive In (DL), or 6 Way Adjustable (6L) optional.
Strike	Square Corner (SS) standard. Round Corner (RS), Dual Strike (DS), or Full Lip Strike (FS) optional.
Latch Bolt	Deadbolt features 1" throw brass bolt.
Handing	Handing not required.
ANSI/BHMA	Tested to exceed ANSI/BHMA Grade 2 security.
ADA	N/A
UL	20-minute certified UL option available.

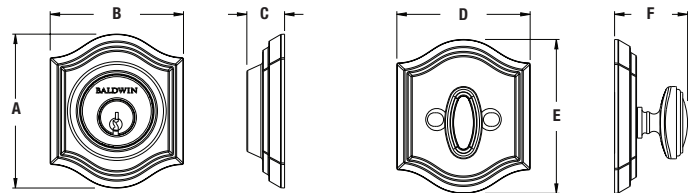

DEADBOLT DIMENSIONS

	TAD	TRD	TSD	CRD	CSD	RAD	RSD
A	3-1/16"	Ø 2-3/5"	2-3/5"	Ø 2-5/8"	2-9/16"	3-5/8"	3-1/8"
B	2-11/16"	N/A	2-3/5"	N/A	2-9/16"	2-11/16"	2-9/16"
C	3/4"	3/4"	3/4"	3/4"	3/4"	1-1/16"	1-1/16"
D	2-11/16"	Ø 2-5/8"	2-5/8"	Ø 2-5/8"	2-5/8"	2-11/16"	2-5/8"
E	3-1/16"	N/A	2-5/8"	N/A	2-5/8"	3-7/16"	2-5/8"
F (SC)	1-7/16"	1-7/16"	1-7/16"	1-7/16"	1-7/16"	1-7/16"	1-7/16"
F (DC)	3/4"	3/4"	3/4"	3/4"	3/4"	1-1/16"	1-1/16"

FINISH AVAILABILITY


	003	044	055	112	150	152	190	260	481	492
TAD	•	•	•	•	•	•	•	•	•	•
TRD	•	•	•	•	•	•	•	•	•	•
TSD	•	•	•	•	•	•	•	•	•	•
CRD	•	•	•	•	•	•	•	•	•	•
CSD	•	•	•	•	•	•	•	•	•	•
RAD									•	•
RSD									•	•

LIMITED LIFETIME MECHANICAL • 25-YEAR FINISH WARRANTY

FUNCTIONS



Single Cylinder (PS)



Double Cylinder (DC)

FINISHES

